

Model **SBP-800-ATS**

SKU **2001928**




FEATURES

- Integrated control panel heating system: arctic rated design
- Advanced control system to provide application flexibility
- Amperage monitoring and data logging capabilities
- Heavy-duty contactor-based design
- Single point lifting bail system, engineered and rated
- Aluminum enclosure to for long-term wear
- Remote cellular or satellite telematic ready
- Fully programmable controller for application integration
- Integrated battery back up system with 1 week life
- Battery charging port with battery disconnect system
- Switchable Voltage Design: 120/208v, 120/240V, 277/480V, 347/600V with lockable selector switch
- Simple access to maintenance and operations
- Highly portable enclosure with fork pockets, castor ready
- Lockable latches standard with key or external lock
- Rugged base frame and enclosure for mobile applications
- Power distribution system uses Eco Power standard gland
- Display of all critical ATS measures
- Wide range of options and accessories available
- Programmable amber beacon system with high visibility LED
- Stackable Frame

UNIT SPECIFICATIONS

Control Standard	CSA C22.2 No. 178.1, UL 1008		
Contactor Production Standard	CSA C22.2 No. 14, UL 60947-1, UL 60947-4-1, IEC 60947-1 & 60947-4-1		
Rated Operational Current At -40 to 131 °F (-40 to 40 °C)	AC-1	690V	1260 A
	AC-3	380/400V	1000 A
	AC-3	660/690V	700 A
	AC-4	380/400V	260 A
	AC-4	660/690V	230 A
Tolerance of Supply Voltage (Any switch position)	Operation	85% - 110%	
	Drop Off	20% - 65%	
Enclosure Rating	Nema 3R		

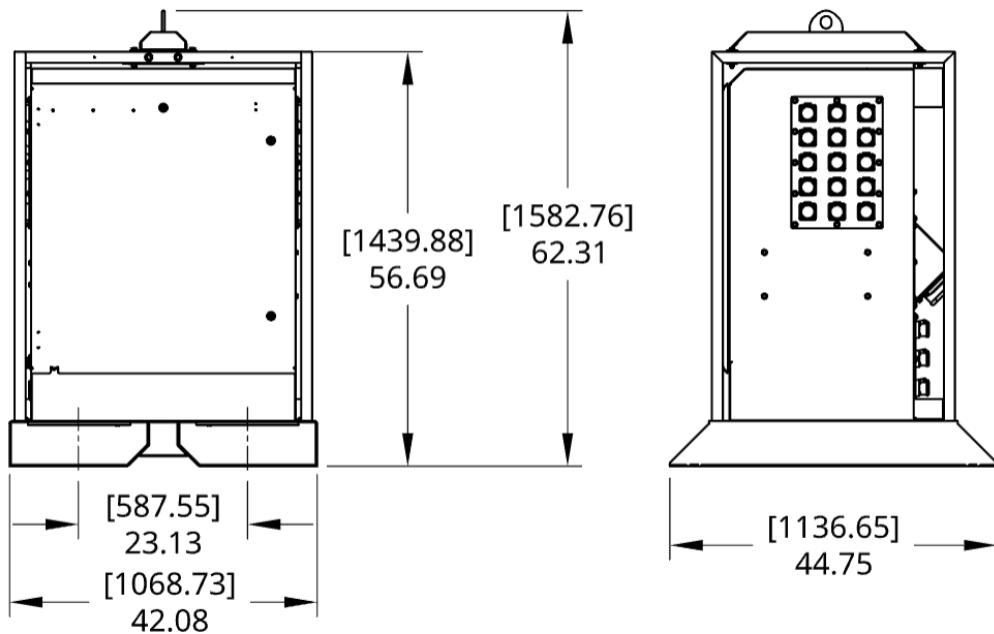

Weight	1194 lbs	543 kgs
Power Distribution (Standard)	Source 1 Connection: 3 x 400 Amp Male Camlock Source 2 Connection: 3 x 400 Amp Male Camlock Load Connection: 3 x 400 Amp Female Camlock	
Shore Power Package	2 x 120V - 20 Amp GFCI Duplex 2 x 120/240V - 50 Amp Twist Lock - CS6369 w/ Integrated 25kVa Transformer	

APPLICATION DATA

ATS CONTROL PANEL

Model	Comap
Function	ATS Controller
Country of Origin	Czech Republic
<ul style="list-style-type: none"> Automatic Transfer Switch (ATS) controller for stand-by and prime-power applications All-in-one intuitive & powerful PC tool for configuration, monitoring and control locally or remotely Easy to install, configure and use Mains-To-Mains or Mains-To-Gen or Gen-To-Gen application PLC editor allows user configurable functions RTC with battery back-up (full calendar) Detailed history log with up to 350 records Current measurement in all phases True RMS measurement English and French languages Active SMS and emails (with 4G option) 	



PROTECTIONS

- Reverse power
- Voltage dependent over-current
- Undervoltage
- Aux Battery Under Voltage
- Annunciator
- Overload(realpower)
- Current unbalance
- Voltage unbalance/Negative sequence voltage
- Contactor Failure
- Overcurrent
- Breaker or contactor failure
- Overvoltage
- Aux Over Voltage
- Aux Over Voltage
- Under frequency
- Auto selective control/transfer

©2026 Eco Power Equipment Ltd. All rights reserved. Specifications and features are subject to change without prior notice. While we endeavor to ensure accuracy, details may be updated or modified after publication.